

FIG. 1

RECEIVED SERVICE ATTRIBUTE TABLE

SERVICE NO.	ATTRIBUTE DEFINITION HEADER					.....
	b7	b6	b5	.....	b0	
No. 1	1	0	0	.....	...	.....
No. 2	0	0	1	.....	...	.....
No. 3	0	1	0	.....	...	.....
No. 4	1	0	0	.....	...	.....
⋮	⋮	⋮	⋮	.....	...	.....

MEANING OF THE RESPECTIVE BITS  
 OF ATTRIBUTE DEFINITION HEADER

- 7TH BIT b7 = 1 → INDICATING THAT THE SERVICE IS A FREE SERVICE
- 6TH BIT b6 = 1 → INDICATING THAT THE SERVICE IS A SUBSCRIBED PAY SERVICE
- 5TH BIT b5 = 1 → INDICATING THAT THE SERVICE IS A NON-SUBSCRIBED PAY SERVICE

FIG. 2

# PROCESS OF SETTING A RECEIVED SERVICE SEARCH IDENTIFIER

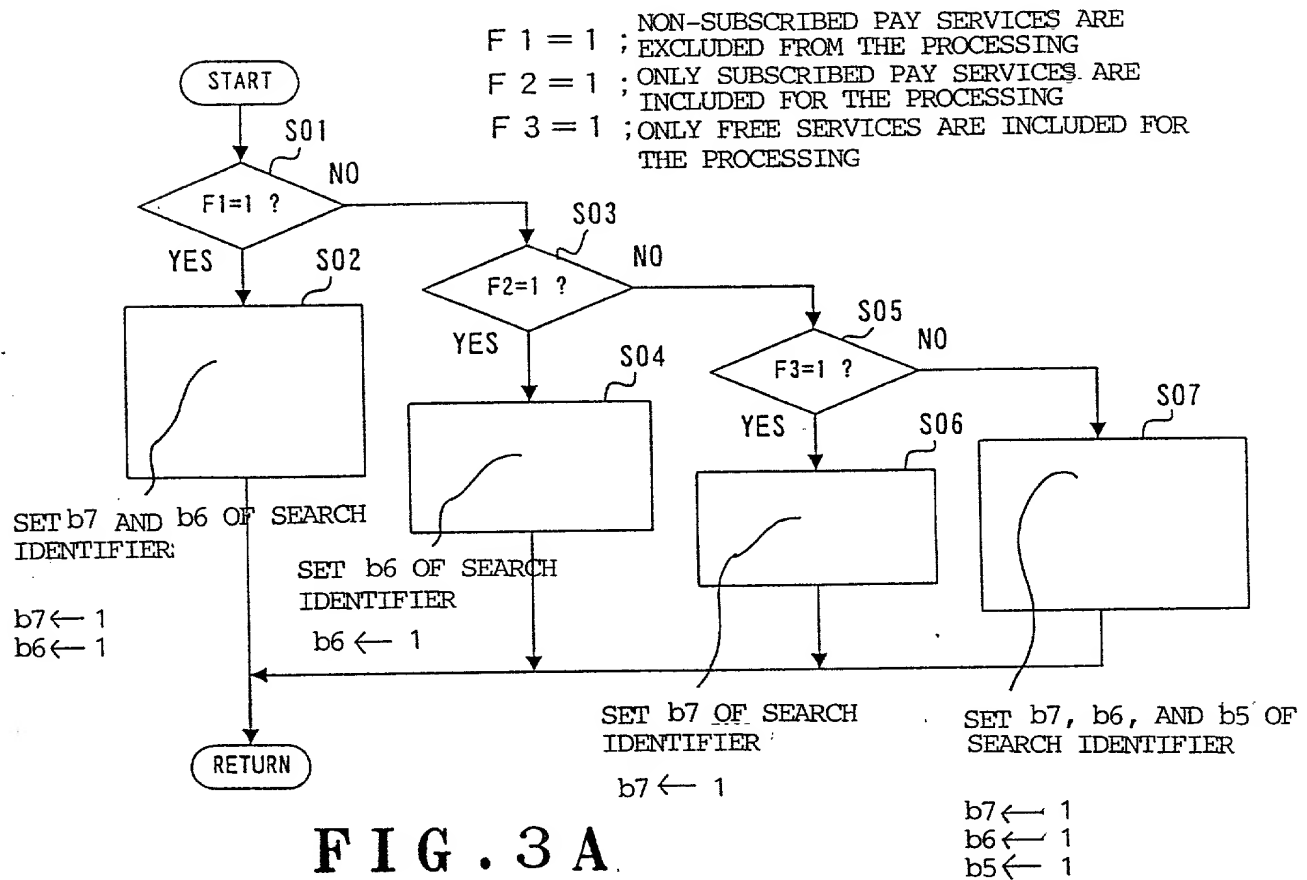


FIG. 3A

## STRUCTURE OF RECEIVED SERVICE SEARCH IDENTIFIER

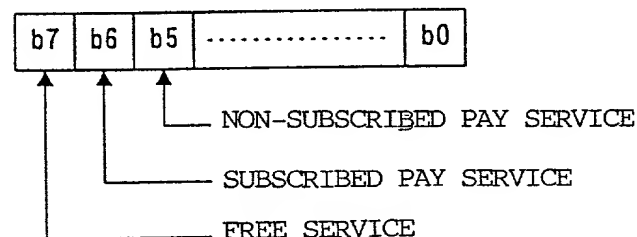


FIG. 3B

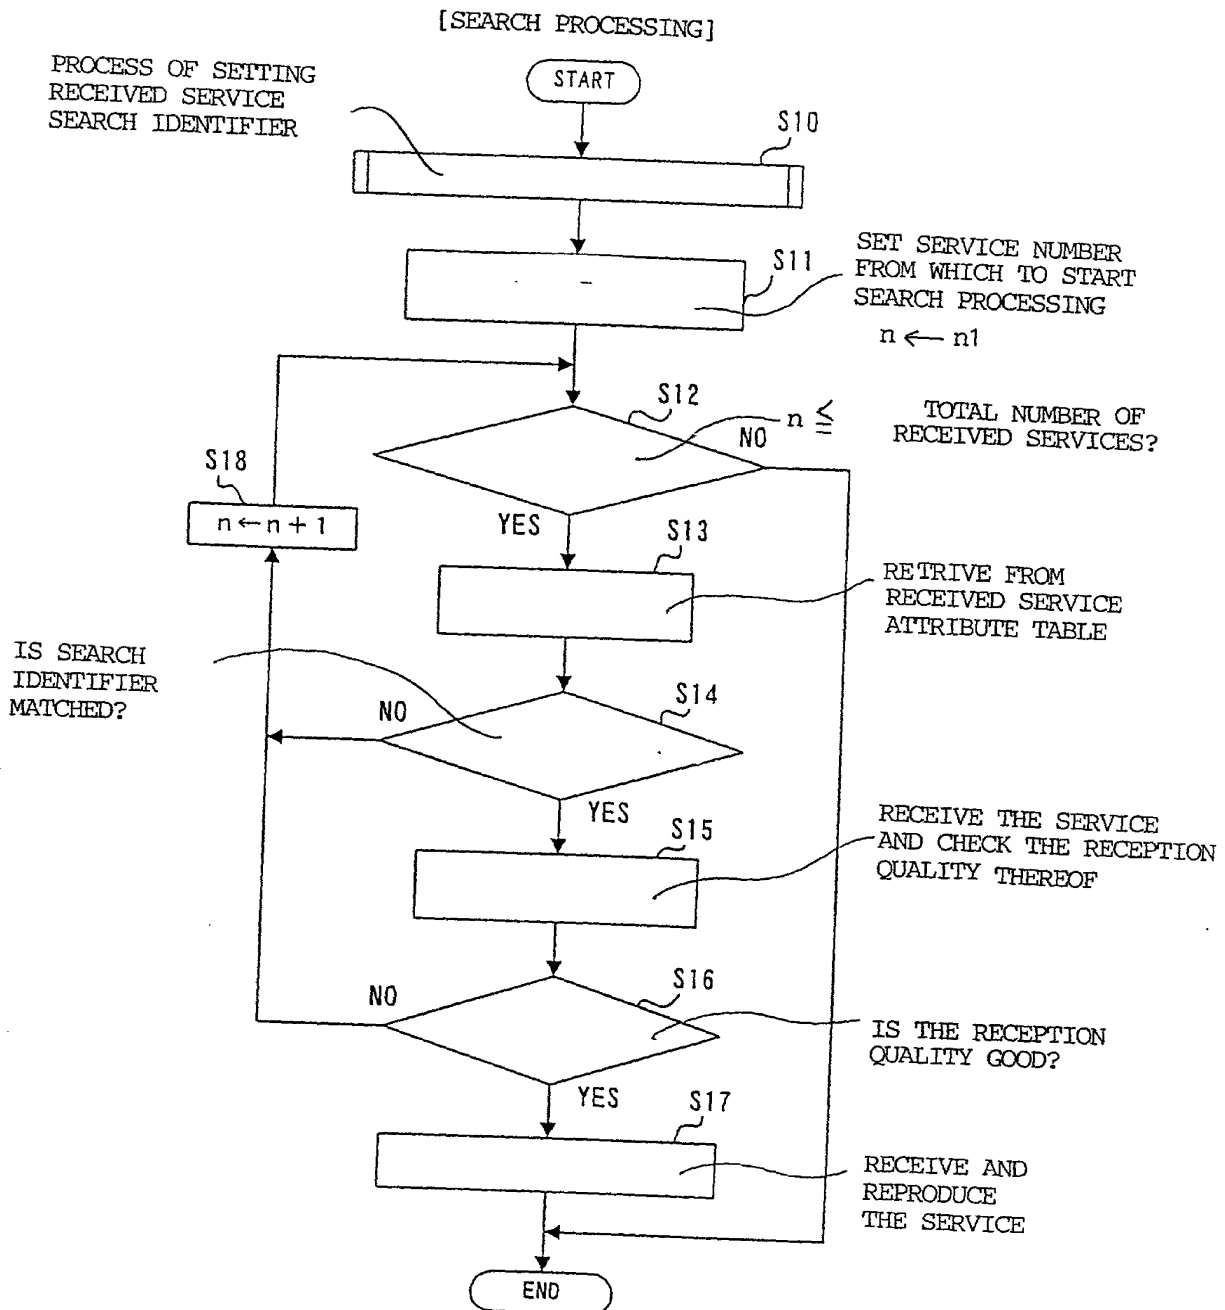


FIG. 4

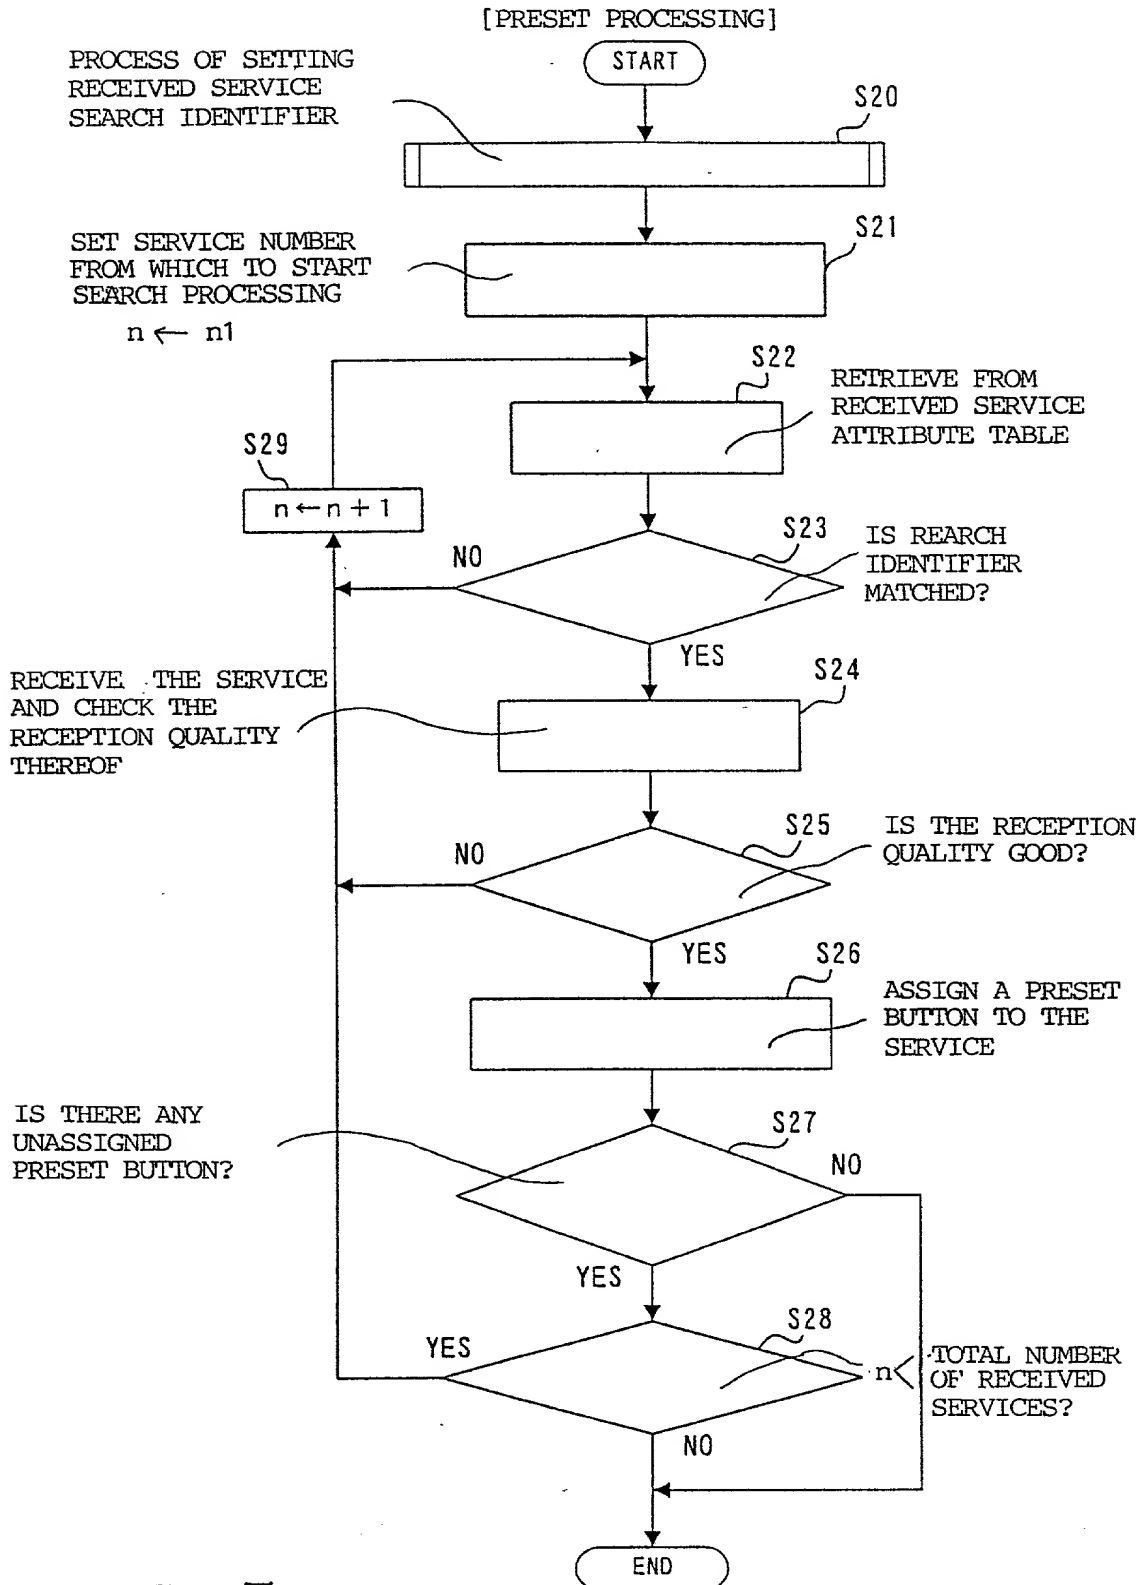


FIG. 5

[SERVICE INFORMATION DISPLAY PROCESSING]

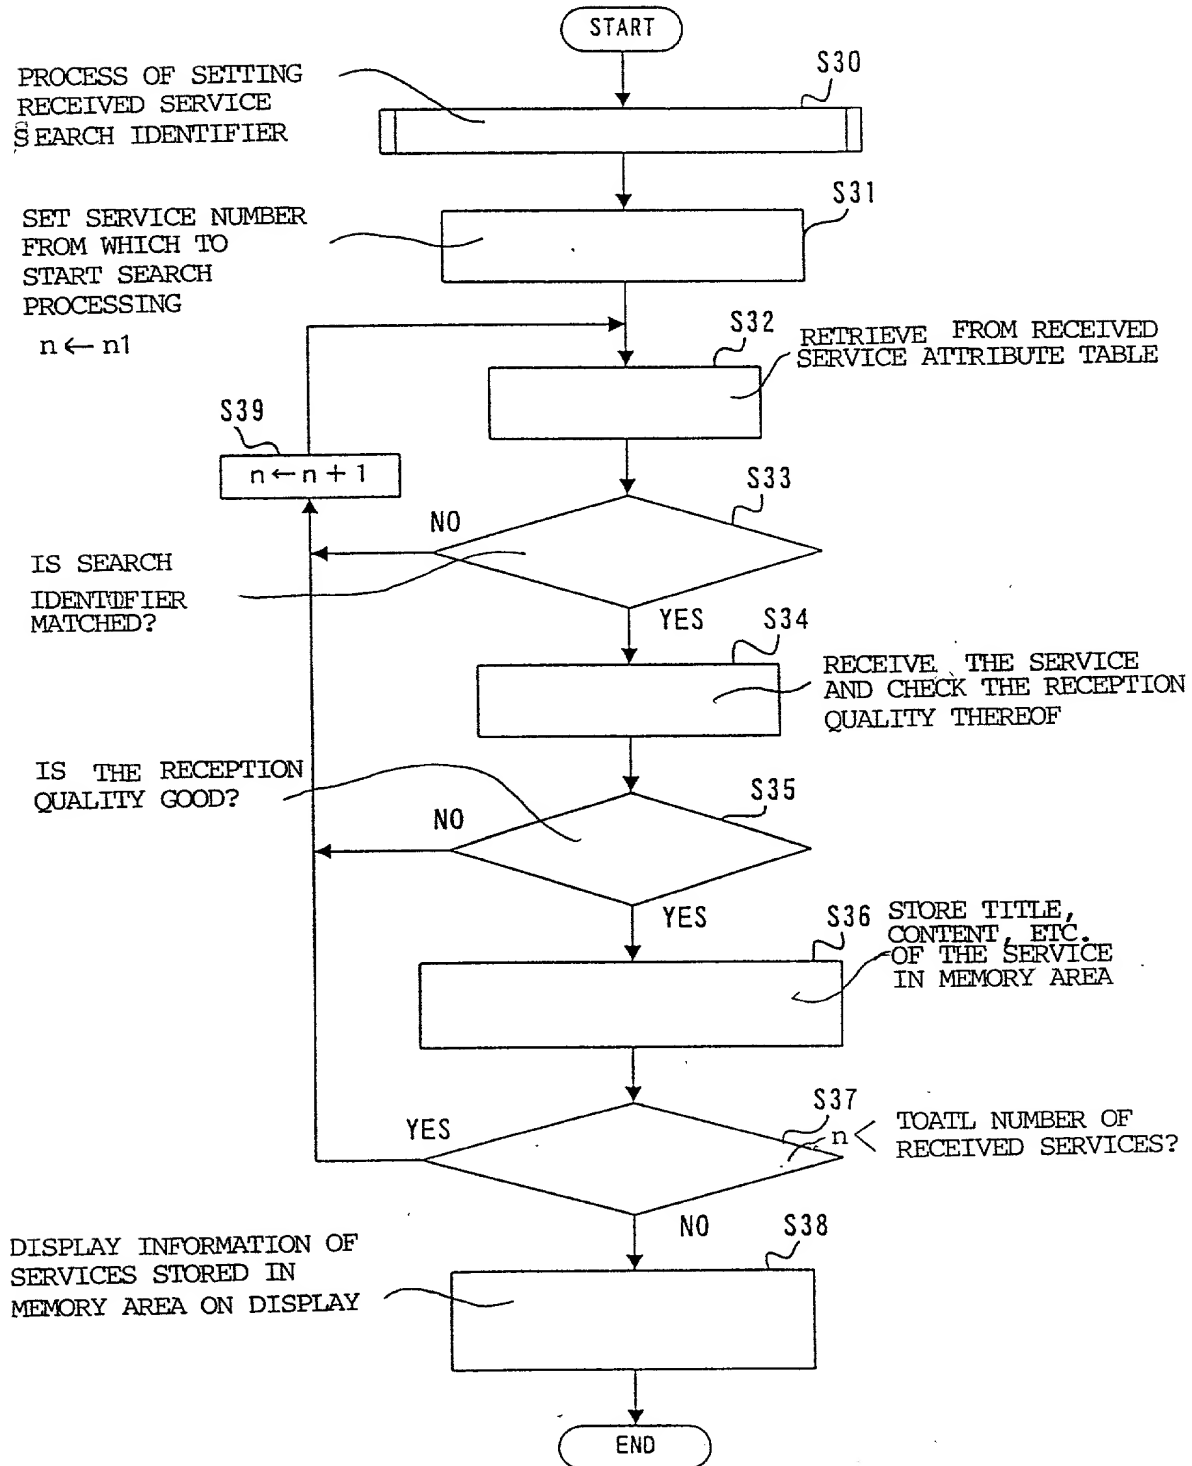


FIG. 6

[NEW SUBSCRIPTION SEARCH PROCESSING]

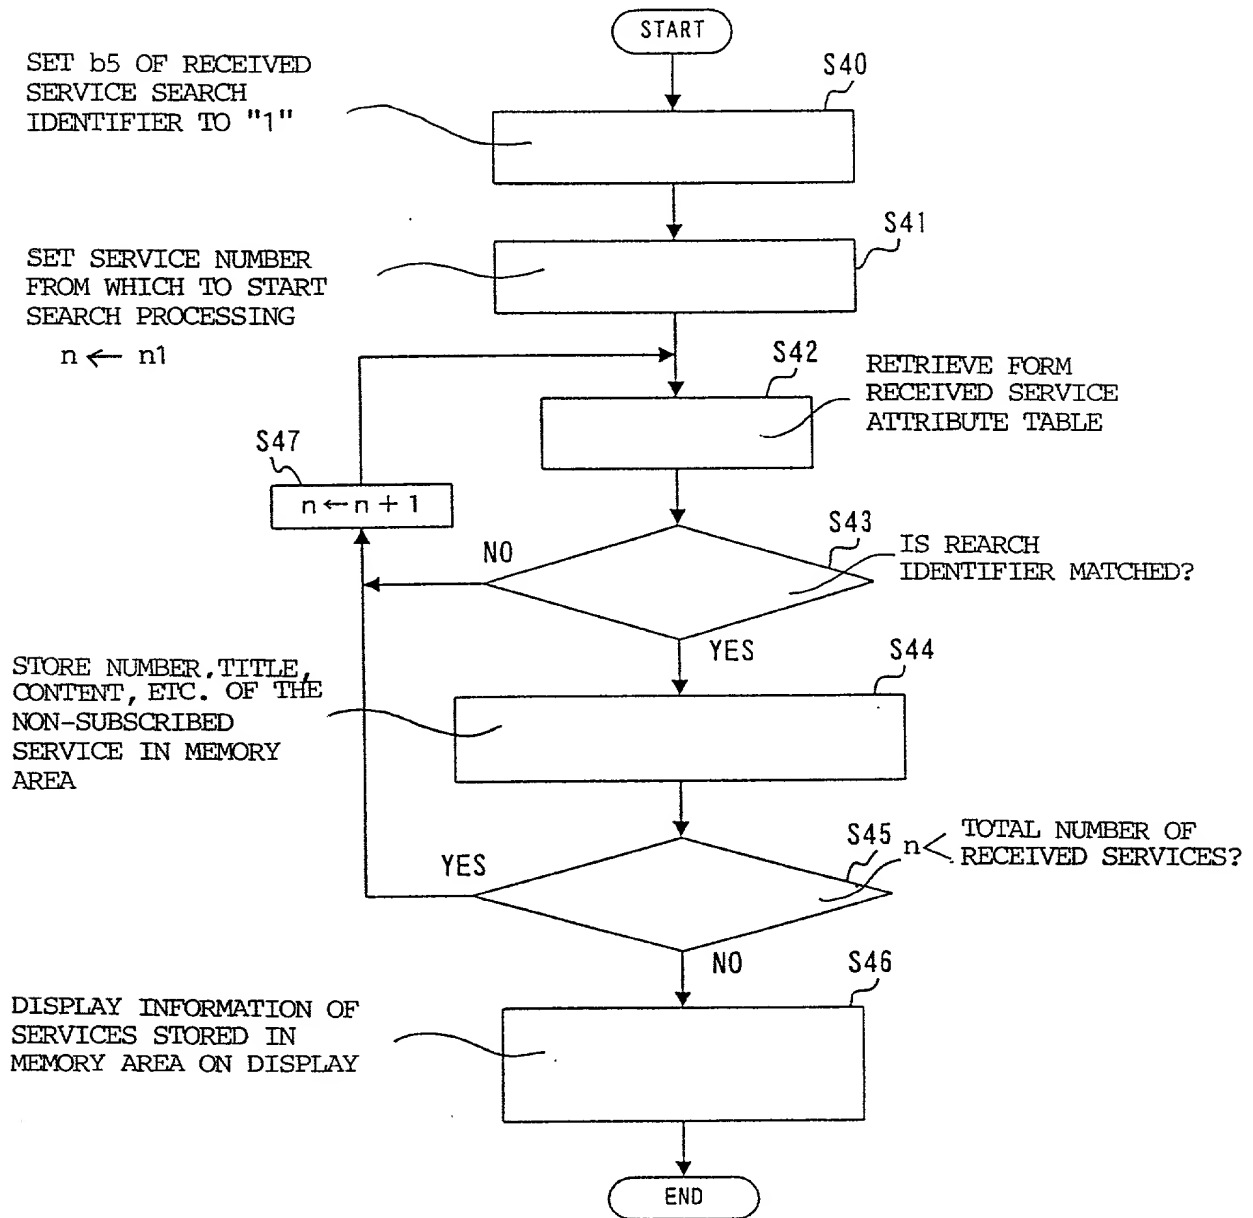


FIG. 7